THE CORPORATE CHRISTMAS TREE CO. LTD.

christmasdirect | D.Z.D | SPARKLING LIGHTS CO UK

Outdoor Mains voltage Meteor Lights (METEORLIGHTS-3-*)

FOR INDOOR AND OUTDOOR USE – Batch no: **XDZD36502025**

These Meteor lights are available in Warm White or Ice White. Each String is 3m long and contains 6 x 60cm Drops with 50cm Spacing. These sets are connectable up to a maximum of 15 Sets (45M)

Connection Instructions

This is a modular, interconnectable lighting system, designed for outdoor use. The Meteor Lights sets are IP44 rated.

1. Connect the power cord to the first snowfall tube by pushing the male/female connectors together.
2. When connecting power cords, lights or accessories, it's important to make a good seal to ensure a waterproof connection. This is achieved by pushing the male and female connectors as tightly as possible ensuring that the rubber 'O-ring' in between the two connectors is compressed to make the seal. Please note if the seal is not made correctly and water gets in your warranty may be invalid.

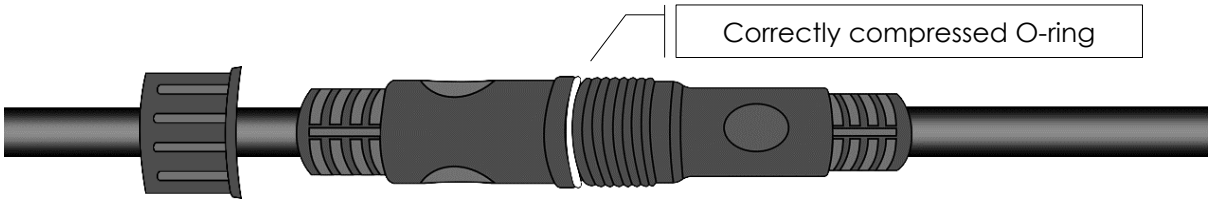

3. The cap can then be screwed into place.

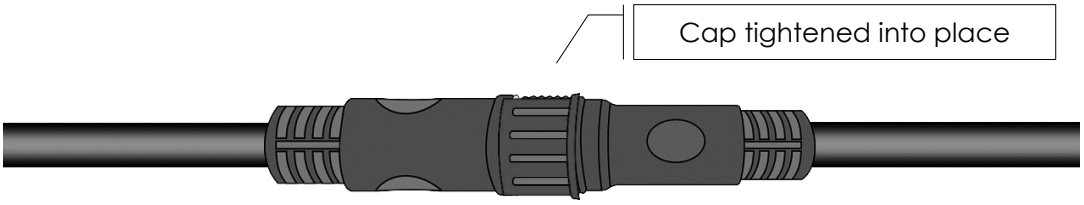

4. Test the lights by plugging them in before you install them.

Accessories

Blank Extension Cable (5 Metre) - Product Code: MAINSFEST-XTO5BC Extension cables are available in 5 metres. Great for adding after your power cord to get from your socket to where your lights start outside. These extension cables can be used anywhere in your display, either after your power cord or in between the light sets to give you extra cabling if required.	
	Power cord - If you need to adapt your display – Product Code: MAINSFEST-PCOBC If you need another plug transformer to light up your display in a different area or replace your existing plug, you can purchase one online using the code above.

Troubleshooting

If for any reason when you first plug the lights in they do not work please try the following and if none of these resolve the issue, please contact us:

1. Is the connector pushed fully together to make a connection?
2. If you have multiple strings connected together and the lights do not seem to be working, please disconnect them all and try connecting each set on its own with the power cord to identify which string is not illuminating.
3. If you have connected your set together, but it fails to light, it may be a polarity issue. Very occasionally the guide notch on the connectors can be placed upside down during manufacturing. You can work around this by simply disconnecting, rotating one connector 180 degrees, and pushing the connectors together - irrespective of the guide notch's position. You may find some resistance but this is normal. **This will not affect the operation of your lights.**

Warnings

1. Do not connect the lights to a power source whilst they are still in the packaging.
2. The external, flexible cable or cord of this light set cannot be replaced; if the cord is damaged, the set should be safely disposed of.
3. The lamps are not replaceable
4. Do NOT overload. Connect up to a maximum of 15 Sets from one plug.

For Full Instructions, technical information and diagrams, please refer to the page on our websites
www.xmasdirect.co.uk, www.dzd.co.uk & **www.sparklinglights.co.uk**
Email: info@xmasdirect.co.uk Telephone: 0333 2406120

UK CA CE RoHS COMPLIANT IP44