THE CORPORATE CHRISTMAS TREE CO. LTD.

christmasdirect | D.Z.D | SPARKLING LIGHTS CO UK

Outdoor Extension Cables (230v) XTO5GC/WC, XTO10GC/WC, XTO5GCMF, XTO10GCMF, XTGCRGB

FOR INDOOR AND OUTDOOR USE – Batch no: **XDZD36502025**

Information

These extension cables are only to be used with our Pro Series 230v sets of lights. They are available in a choice of White or Green and static and multifunction to match your light set. These can be added anywhere in your lights display and there is no limit on the number of cables you can use.

Connection Instructions

This is a modular, interconnectable system, designed to connect directly to either the power cord or between the light sets and can be used in conjunction with the splitters and top cable accessories.

1. When connecting these extension cables, it's important to make a good seal to ensure a waterproof connection. This is achieved by pushing the male and female connectors as tightly as possible ensuring that the rubber 'O-ring' in between the two connectors is compressed to make the seal. Please note if the seal is not made correctly and water gets in your warranty may be invalid.

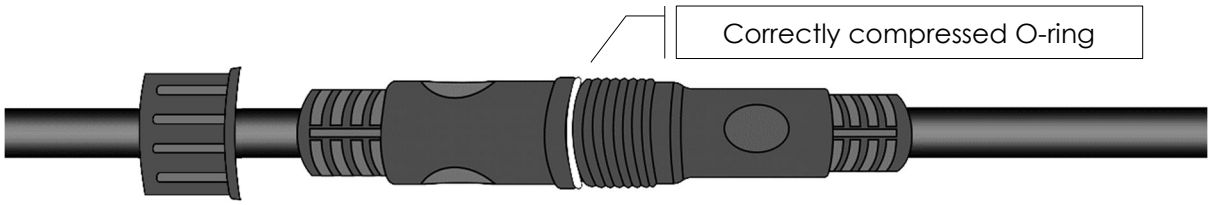

2. The cap can then be screwed into place. There will be a cap provided for the end of the lights only not the extension cables.

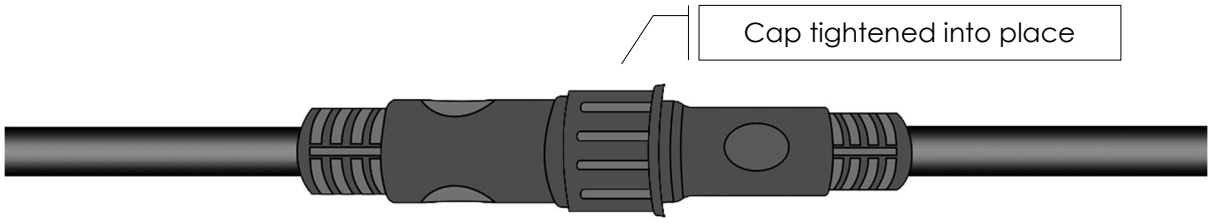

3. Test all your items fully by plugging them in before you install them.

Warnings

1. The external, flexible cable or cord of this extension cannot be replaced; if the cord is damaged, the set should be safely disposed of.
2. The extension is not a toy – please keep it away from children.
3. Please test the lights on their own before you add the extension cable/s into the display.
4. Please check you have received the correct extension

Troubleshooting

If for any reason when you first plug the extension into the lights they do not work please try the following and if none of these resolve the issue, please contact us:

1. Is the connector pushed fully together to make a connection?
2. If you have connected your set together, but it fails to light, it may be a polarity issue. Very occasionally the guide notch on the connectors can be placed upside down during manufacturing. You can work around this by simply disconnecting, rotating one connector 180 degrees, and pushing the connectors together - irrespective of the guide notch's position. You may find some resistance but this is normal. **This will not affect the operation of your display.**

Installation Tip

Occasionally, the rubber cabling can harden in cold temperatures, which could result in the connectors being more difficult to install.
If this occurs, warming the connectors with a hairdryer will soften the rubber and help you push the connectors together fully to create the waterproof seal.

Pro Series Accessories Range	
	**Splitters (available in 2 way BYS, 3 way BYS3 and 5 way BYS5)** Splitters are the key to lighting many sections of a building neatly, without the need for additional power sources. Use splitters at any point in your light sections to branch off in different directions. With 2, 3 and 5 way splitters available, the possibilities are endless.
Top Cables (available in 5 socket, 10 socket or 20 socket) TOPCABLE-5-GC Top cables are the perfect solution for creating stunning light curtains or splitting off in many directions. They can be used to light sections of wall or window, or perhaps wrap a pillar or cover a ceiling for an effective light display.	

For Full Instructions, technical information and diagrams, please refer to our websites
www.xmasdirect.co.uk, **www.dzd.co.uk &** **www.sparklinglights.co.uk**
Email: info@xmasdirect.co.uk Telephone: 0333 2406120 Perth UK PH1 3WB

UKCA CE RoHS COMPLIANT IP65

EXTENSION LEAD **ACCESSORIES**